


TABLE INSTRUCTIONS

TO LOWER THE TABLE:

1. LIFT UP ON THE TABLE TO RELIEVE PRESSURE ON THE QUICK PIN SUPPORTING THE TABLE BRACKET.
2. CONTINUE SUPPORTING THE TABLE AND REMOVE THE QUICK PIN BY TURNING IT IN A CLOCKWISE MOTION 1/2 TURN AND PULL STRAIGHT OUT. (STORE THE QUICK PIN IN THE KEEPER PROVIDED)
3. SLOWLY LOWER THE TABLE UNTIL IT COMES TO REST ON EITHER THE CABIN SOLE OR THE DINETTE SETTEE TOP.

TO RAISE THE TABLE:

1. RAISE THE TABLE AND BRACKET UP PAST THE PROVIDED HOLE IN THE COMPRESSION POST
2. CONTINUE SUPPORTING THE TABLE AND REPLACE THE QUICK PIN THRU THIS HOLE. ENSURE THE QUICK PIN IS LOCKED IN PLACE USING THE "SAFETY" SLOTS PROVIDED ON THE QUICK PIN.
3. SLOWLY LOWER THE TABLE UNTIL THE BRACKET COMES TO REST ON THE QUICK PIN.
4. ROTATE THE TABLE BACK AND FORTH UNTIL IT "DROPS" INTO PLACE. THIS HAPPENS WHEN THE ENGAGED QUICK PIN AND THE SLOT ON THE TABLE BRACKET SLEAVE LINE UP AND LOCK INTO PLACE.

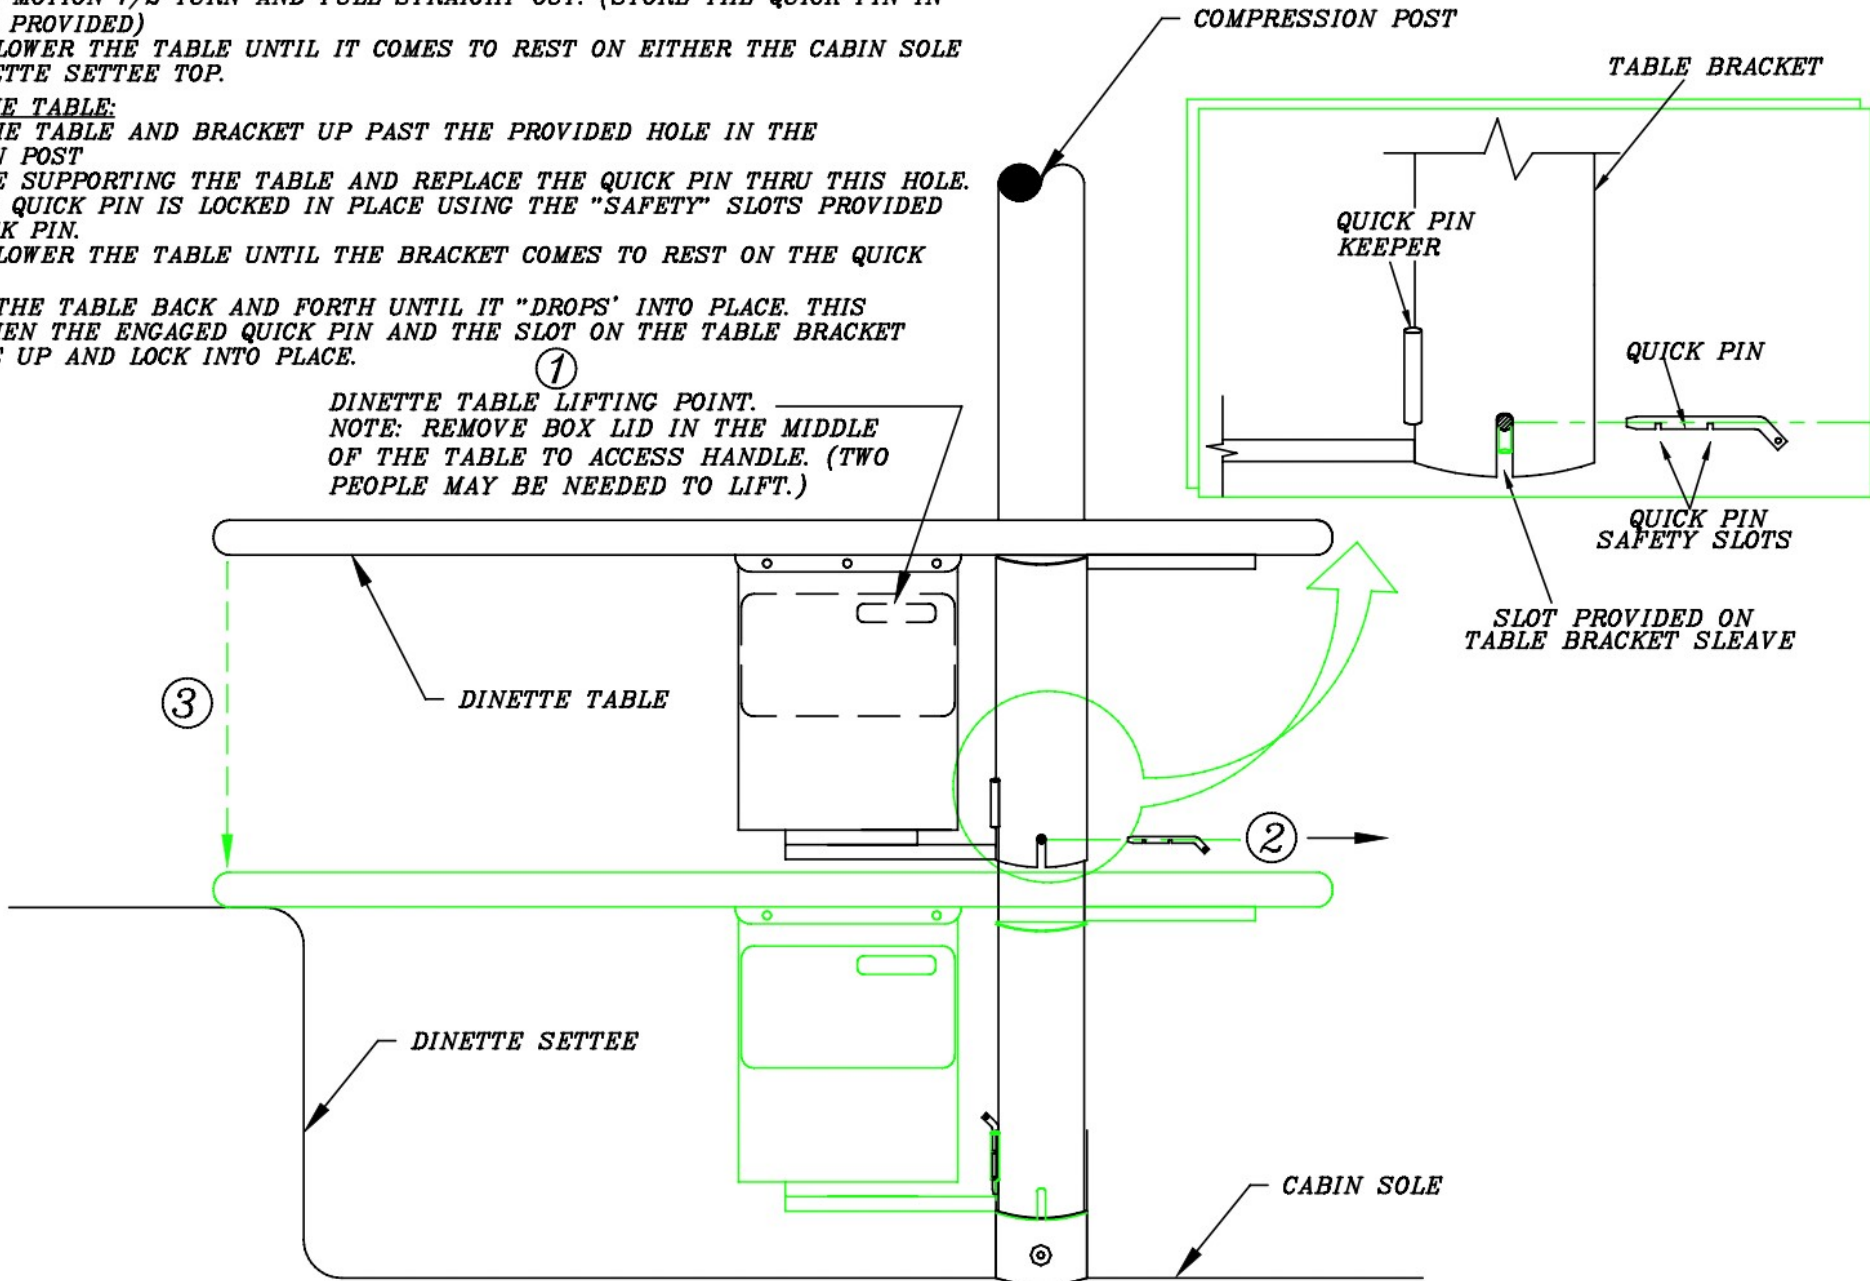

PAGE 110

DRAWING TITLE	
H386 DINETTE TABLE OPERATION	
DRAWING NO.	REVISION NO.
3808041C	NONE
DESIGNED BY	DATE
ENGINEERING DEPT.	10/27/98

This document discloses information for which HUNTER MARINE CORP. has proprietary rights.